


start

1



R D 0 3

8 Disable UPC/EAN



reset to default

2




9 disable terminator



start

3



suffix

10



K E 8 7


4

virt com



etx

11

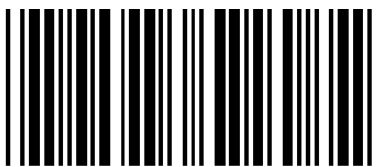

S M 0 5

5


repeat mode



set

S E T

12

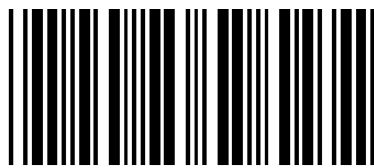

I T 0 4


6

check cd



enable ident


13

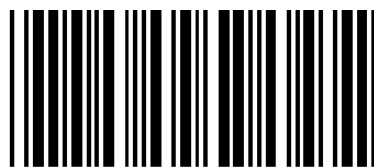

R D 0 2

disable codebar

7



code39 ident



SOH 14



18

S E T




15




19

+ -

end



if ident 16



17 stx